



Trade Lighting Guide 2022



lighting
excellence

Quality, Design & Innovation to Believe in



INTRODUCTION

Trusted by professionals for over 25 years, we use our industry leading expertise to provide simple and complete lighting solutions to reinvigorate any space. With well-designed, high-quality products that each go through a rigorous testing process, 4lite makes a difference to professional users by transforming and enhancing a wide range of applications.



Welcome to 4lite



Our experts are dedicated to innovation – investing in tools, research, and facilities around the world to deliver the latest in lighting design, technology, and performance. Our industry leading smart products offer customers the opportunity to have their lights to do everything they want and more.

Utilising smart Connected by WiZ technology, customers can enjoy full control of lights whether it is through Wi-Fi, mobile data networks, the Wi-Fi remote or existing switches.

4lite is part of Endo Lighting Corporation of Japan, a global business renowned for its expertise in LED lighting.

Contents

6 4lite Quality

7 4lite Service

8 Product Delivery

9 Lighting Design

10 4lite Connected by WiZ

12 Icon Guide

14 Fire Rated Downlights

16 Downlights

28 Under Cabinets

34 Pendants



Contents



60 Garden Spikes, Ingrounds & Wall Lights

82 Festoon & Lanterns

88 Solar Wall Lights, Solar Bollards & Bollards

98 Floodlights & Security Lights

112 High Bays

118 Battens

124 Bulkheads

132 Index


134 Glossary



4lite Quality

What we do, we do well. All our products go through a rigorous testing process, ensuring we can deliver quality products that make a real difference. We know how important product quality is to you and your customers, that's why every product you buy from us is well-designed and thoroughly tested.

We're delighted to have achieved an LIA certification for our UK testing facility, which is one of six of its kind in the UK. This means all our products are rigorously tested in-house with our state-of-the-art goniophotometer, allowing our experts to verify their quality and performance, and ensure they adhere to the highest industry standards.

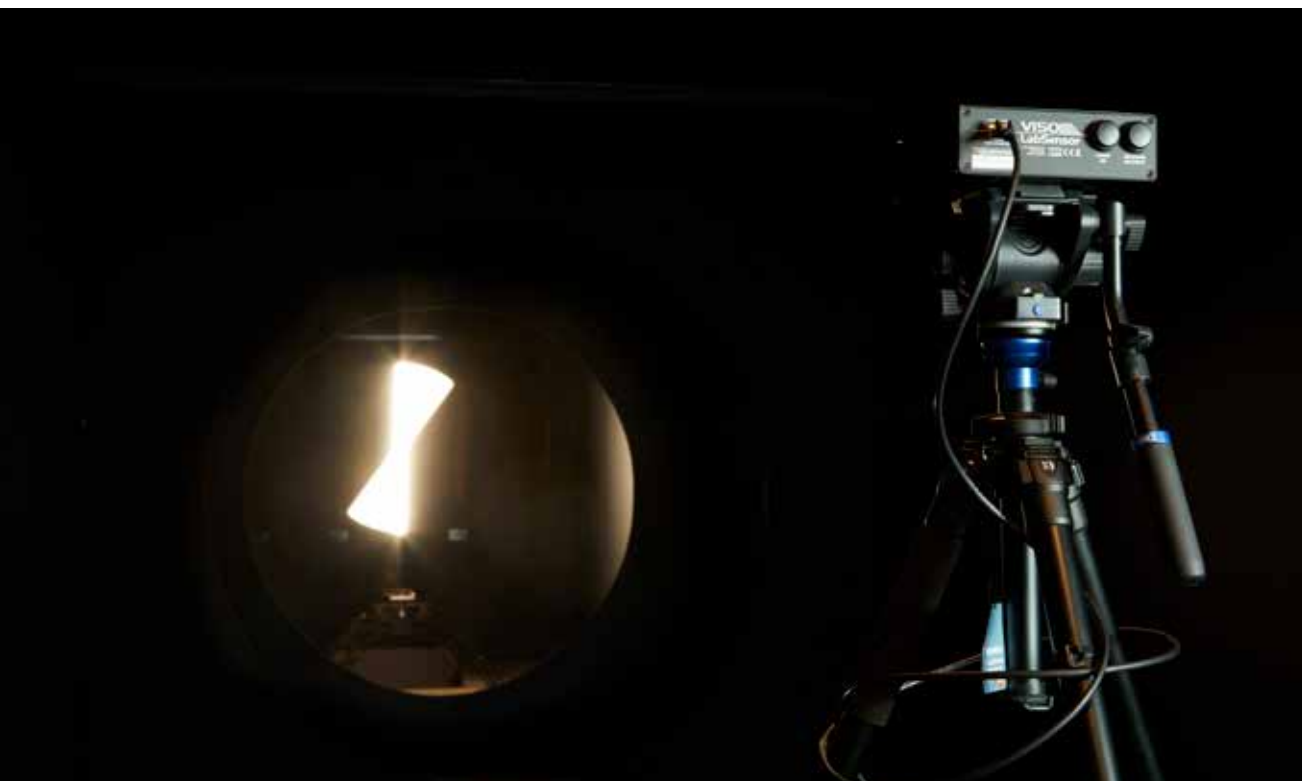



You can trust our products are fully compliant; our fire rated downlights are tested to 30, 60 and 90 minutes. We pride ourselves on developing products to the highest standards.

That's why all 4lite products come with a minimum 4-year warranty* to give our customers complete peace of mind. We also offer superior pre-sales and post-sales support. With a team of highly skilled lighting designers and technical engineers on hand to assist any queries. This is backed up by fantastic sales and marketing support.

*Minimum 4 year warranty requires a registration. Please register at 4liteuk.com/warranty. (excluding the essentials range)

Product Delivery

Our warehouse staff have a wealth of experience in warehouse management, ensuring our products are despatched efficiently. From our 100,000 square ft warehouse and production facilities in Warrington we operate our multi-million-pound stockholding, allowing us to offer next day delivery to the UK and a same day collection service and a 2-3 day delivery within Mainland Europe.

4lite has a state of the art showroom in Cheshire, accessible to you if you would like to book an appointment please contact your local Sales Manager.



Lighting Design

4lite offer free access to our Lighting Design Team, allowing you our valued customers support with your lighting design schemes for all your commercial projects. Our highly experienced team use the latest Relux and Dialux software and can deliver designs tailored to your specific needs, with fast turnaround times, all free of charge.

STEP 1



Gather information required for a lighting design to fill out the template, including drawings or dimensions, specifications and ceiling heights.

STEP 2




Submit these details to your local Sales Manager.

STEP 3



Once completed, your lighting design will be emailed out to you, including part codes and quantities, lighting calculations, and marked up drawings if available.

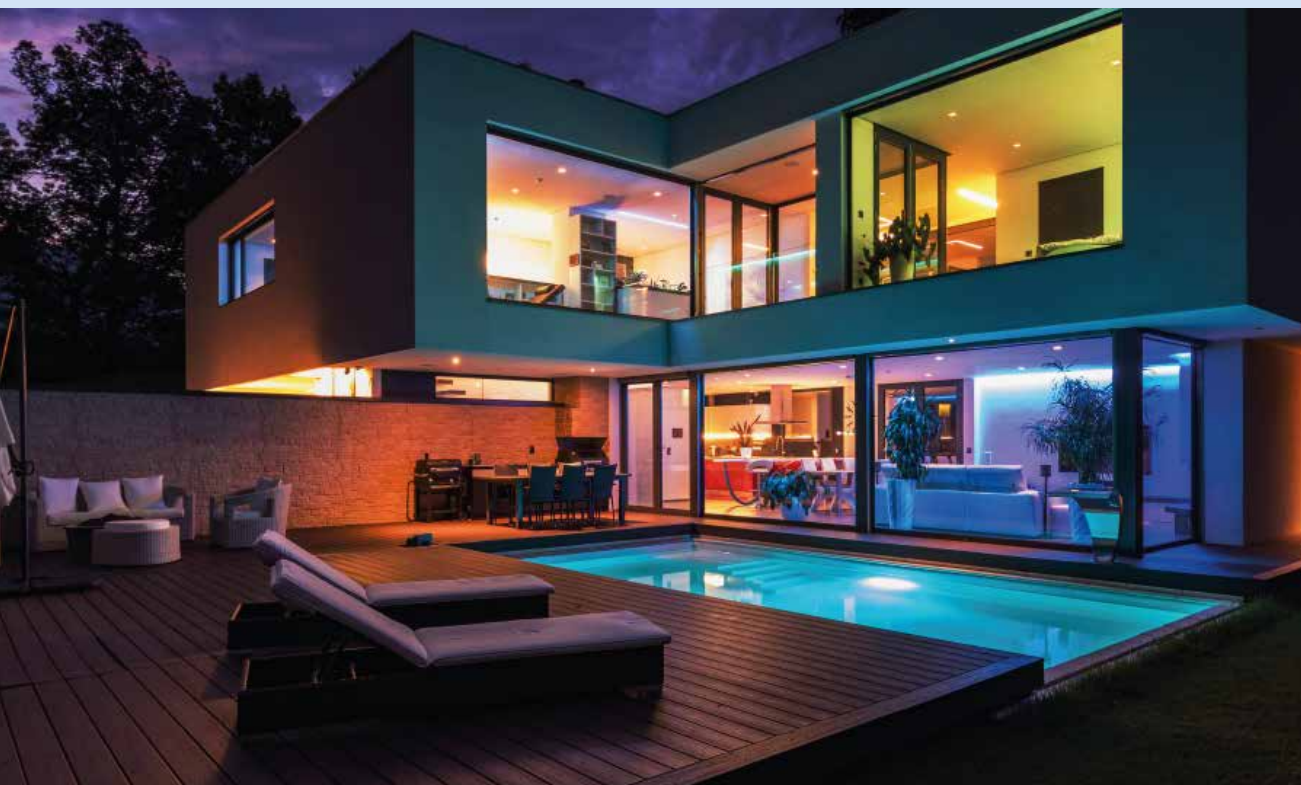


4lite Connected by WiZ

MAKE LIGHT WORK

Welcome to the beautiful world of 4lite Connected by WiZ...

Get your lights to do everything you want and more. Using 4lite Connected by WiZ technology you can enjoy full control of your lights whether it's through Wi-Fi, mobile data networks, the Wi-Fi remote or your existing switches. By giving you more ways to control, you're spoiled for choice when it comes to how you'd like to interact with your light. Works with IFTTT and thanks to the cloud, 4lite Connected by WiZ lights integrate easily with most other connected systems so you can use triggers from your other favourite apps. Turn on the light when my security camera detects motion. Change the light to cool white when it gets hot. Change the light to bright red in case of a carbon monoxide emergency. With Hey Google, Apple Siri shortcuts on iOS 12, Samsung SmartThings and Amazon Alexa, you can even control your lights with your voice!





Connected by

WiZ

4 STEPS TO CONNECT

1

Choose your 4lite Connected by WiZ product

Make the switch to 4lite smart lighting and explore the endless possibilities.

2

Install your 4lite Connected by WiZ light

Our range of products are easy to install.

3

Download the 4lite Connected by WiZ app

Available on the App Store or Android Play

4

Connect your 4lite devices

Follow the simple setup instructions on the app.



App Control



Voice Control



No Hub Needed



Schedules & Security



Integrations



Scenes & Colours

Iconic

A GUIDE TO OUR ICONS



These handy icons are found throughout our brochure to make it as simple as possible for you to find the right products.

Features



Warranty (yrs)

The product is backed up with a minimum XX year warranty



Dimmable

This product is dimmable



USB

This product utilises batteries and is charged using USB 2.0



IK Rating

This product has achieved an impact protection rating of IK XX



AC LED no driver required

This product utilises AC alternating current



CCT selectable

The colour temperature on this product can be selected



Fire Rated

This product is fully fire rated



Solar powered

This product utilises solar powered batteries



Wi-Fi

This product is Wi-Fi enabled and can be controlled using a smart device



IP Rating 20-70

This product achieves XX ingress protection rating



Bluetooth

This device is Bluetooth enabled

Compliance



CE Mark

Conformity with European health, safety, and environmental protection standards



UKCA Mark

Conformity with the applicable requirements for products sold within Great Britain



Part C

This product is fully tested to meet Part C of Building Regulations (resistance to contaminants and moisture)



Part E

This product is fully tested to meet Part E of Building Regulations (resistance to sound)

Specification



Class 1

This product has an earth connection



Class 2

This product has double insulation



Class 3

This product has Supply of Safety Extra Low Voltage (SELV)



Beam angle

The beam angle achieved by the specified product



RGB LED

This product can be programmed to use red, green and blue LED light



Zone 1

This product is compatible for use in bathroom Zone 1: BSEN7671:2008



Zone 2

This product is compatible for use in bathroom Zone 2: BSEN7671:2008



GU10

This product will use a GU10 lamp



E27

This product will use a E27 lamp



B22

This product will use a B22 lamp



Colour rendering index (CRI)

measures the ability of a light source to accurately reproduce the colours of the object it illuminates.



PIR sensor

This product has an integral PIR sensor



RA Rating

Ra value, provides information about the quality of the colour rendering of a light source.



Cut out dimensions

Cut out size needed for installation



A guide to 30, 60, 90 minute fire rated downlights

If you are installing or replacing recessed lighting in a domestic or commercial property, then it's important to understand what you need to do to stay within the law. And how you can keep the building's occupants safe.

Downlights are increasingly popular in homes and workplaces but only some of the options are classed as fire rated downlights. Understanding what that means, and the classification system, can ensure that you choose the correct rating for your next project.

What are fire rated downlights?

Fire rated downlights are a legal requirement for any lighting that is either recessed or semi-recessed into a ceiling. This is because creating a hole in the ceiling compromises its fire retardancy. Plaster board ceilings offer a degree of resistance to fire, but this is reduced by the fact that holes have been cut into its surface. Fitting the correct fire rated downlight "plugs" this gap and restores the fire-resistant surface. Therefore, if a fire did break out, its progress would be slowed. Also, many fire rated downlights incorporate an intumescent pad. If this is exposed to heat, it expands, further interrupting the spread of fire. Fire rated downlights can also be fitted with an additional safety feature – a fire hood. This serves to avoid accumulated dust and other debris interfering with the downlight's effectiveness in a fire. You should also make sure that the downlights you purchase are fitted with a moisture seal. This stops condensation from penetrating the ceiling hole.

How the ratings work

Clearly, fire rated downlights cannot dampen or extinguish flames. Their purpose is to slow a fire's progress across the ceiling. The effectiveness of these lighting components is measured in classifications of 30, 60 and 90 minutes. That indicates the timeframe you have before a fire would cause the ceiling to collapse. Each rating is designed to be used in different circumstances and locations.

When do you not need fire rated downlights?

There is no obligation to use fire rated downlights if you are fitting surface mounted ceiling lights.

Which rating do you need?

The fire rating of a downlight must match the fire rating of the ceiling, in order to maintain its minimum period of fire resistance. Generally, downlights with the lower ratings, and therefore a shorter timeframe for fire resistance, are used on lower floors, where occupants have less distance to travel. Downlights with higher ratings are used on higher floors, to give people a longer time to evacuate the building. Fortunately, the majority of downlights are tested for up to 90 minutes of fire resistance, which is suitable for most buildings.

Browse our full range of fire rated downlights on the 4lite site. If you have any questions, please don't hesitate to contact us!

Downlights



- 16.** LED Fire Rated Downlight
- 18.** LED Fire Rated Downlight CCT Selectable
- 20.** Smart LED Fire Rated Downlight
- 22.** Smart LED Fire Rated IP65 GU10 Downlight
- 24.** Smart LED Fire Rated IP20 GU10 Downlight
- 26.** Smart LED Fire Rated IP20 GU10 Adjustable Downlight

Downlights



LED Fire Rated Downlight

Suitable
for use in:

- Kitchen
- Bedroom
- Bathroom
- Office
- Hotel
- Restaurant

Features




- **LED dimmable fire rated downlight.**
- **Supplied with matt white bezel as standard.**
- **Integral driver with push-fit loop-in, loop-out terminals for ease and speed of installation.**
- **Low profile design allows installation into reduced height ceiling voids.**
- **LED lifespan L70 42,000 hours.**
- **Equivalent Wattage - Max 50W GU10.**

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/2000/3	5056144219889	LED Fire Rated Downlight	8.5W	653	3000K	220-240V	50-60Hz
4L1/2000/4	5056144219896	LED Fire Rated Downlight	8.5W	716	4000K	220-240V	50-60Hz

SKU Code	Description
4L1/2002	Chrome Bezel
4L1/2003	Satin Chrome Bezel
4L1/2004	Black Bezel



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Downlights



LED Fire Rated Downlight CCT Selectable

Suitable
for use in:

- Kitchen
- Bedroom
- Bathroom
- Office
- Hotel
- Restaurant

Features

Compliance


Specification



- LED dimmable fire rated downlight.
- Supplied with matt white, chrome and satin chrome bezels as standard.
- Integral driver with push-fit loop-in, loop-out terminals for ease and speed of installation.
- LED lifespan L70 40,000 hours.
- Integral switch allows user the choice of 3000K, 4000K and 6000K colour temperature options.
- Low profile design allows installation into reduced height ceiling voids.
- Equivalent Wattage - Max 50W GU10.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/2001	5056144219902	LED Fire Rated Downlight CCT Selectable	9W	717	3000K	220-240V	50-60Hz
				770	4000K		
				651	6000K		

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty









Smart LED Fire Rated Downlight

Suitable
for use in:

- Kitchen
- Bedroom
- Bathroom
- Office
- Hotel
- Restaurant

Features



- Detachable LED driver for fast installation.
- Fully tested for 30, 60, 90 minute ceiling types.
- Wi-Fi & Bluetooth - works with a standard Wi-Fi router.
- Controlled via smartphone, tablet, smart sensors, smart remotes or voice control.
- Works with Alexa, Hey Google, Apple Siri, Samsung SmartThings.
- IFTTT compatible.
- 8W LED equivalent to 60W.
- Colour variant Bezel options available.
- LED Lifespan L70 40,000 hours.

Compliance




Specification



SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/2005	5056144238750	Smart LED Fire Rated Downlight	8W	675	2700-6500K	220-240V	50-60Hz

SKU Code	Description
4L1/2002	Chrome Bezel
4L1/2003	Satin Chrome Bezel
4L1/2004	Black Bezel



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Supplied with Smart LED GU10
Lamp

Downlights



Connected by
Wiz



4L1/2210



4L1/2211



4L1/2212

Smart LED Fire Rated IP65 GU10 Downlight

Suitable
for use in:

- Kitchen
- Bedroom
- Bathroom
- Office
- Hotel
- Restaurant

Features


Compliance

Specification



- Compact IP65 fire rated downlight for shallow ceiling spaces.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Rubber coated spring clips for ease of installation and ceiling protection.
- Supplied with smart GU10 LED lamp Wi-Fi & Bluetooth, tuneable white and dimmable.
- Wi-Fi & Bluetooth - works with a standard Wi-Fi router.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- IFTTT compatible.
- LED lamp 4.9W - equivalent to 50W.
- LED Lifespan L70 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/2210	5056144254118	Matt White GU10	4.9W	345	2700-6500K	220-240V	50-60Hz
4L1/2211	5056144254125	Chrome GU10	4.9W	345	2700-6500K	220-240V	50-60Hz
4L1/2212	5056144254132	Satin Chrome GU10	4.9W	345	2700-6500K	220-240V	50-60Hz

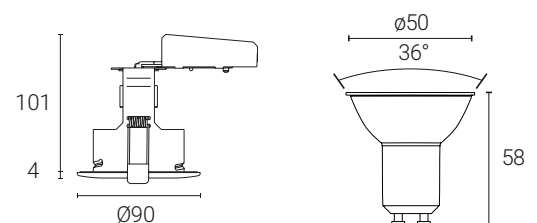

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty







4L1/2213



4L1/2214



4L1/2215

Smart LED Fire Rated IP20 GU10 Downlight

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Office
- Hotel
- Restaurant

Features


Compliance

Specification



- Compact fire rated downlight for shallow ceiling spaces.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Rubber coated spring clips for ease of installation and ceiling protection.
- Supplied with smart GU10 LED lamp Wi-Fi & Bluetooth, tuneable white and dimmable.
- Wi-Fi & Bluetooth - works with a standard Wi-Fi router.
- Control your lights wirelessly and remotely with the WIZ App.
- Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- IFTTT compatible.
- LED lamp 4.9W - equivalent to 50W.
- LED Lifespan L70 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/2213	5056144254149	Chrome GU10	4.9W	345	2700-6500K	220-240V	50-60Hz
4L1/2214	5056144254156	Matt White GU10	4.9W	345	2700-6500K	220-240V	50-60Hz
4L1/2215	5056144254163	Satin Chrome GU10	4.9W	345	2700-6500K	220-240V	50-60Hz

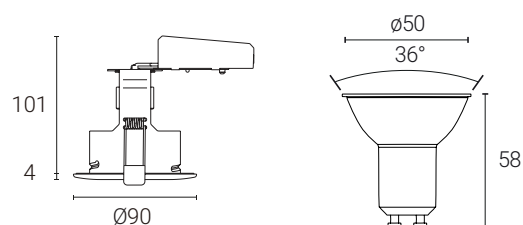

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



4L1/2216



4L1/2217



4L1/2218

Smart LED Fire Rated IP20 GU10 Adjustable Downlight

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Office
- Hotel
- Restaurant

Features

Compliance


Specification



- Compact fire rated downlight for shallow ceiling spaces.
- Twistlock lamp retaining ring for ease of lamp replacement.
- Rubber coated spring clips for ease of installation and ceiling protection.
- Supplied with smart GU10 LED lamp Wi-Fi & Bluetooth, tuneable white and dimmable.
- Wi-Fi & Bluetooth - works with a standard Wi-Fi router.
- Control your lights wirelessly and remotely with the WIZ App.
- Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- LED lamp 4.9W - equivalent to 50W.
- LED Lifespan L70 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/2216	5056144254170	Chrome GU10	4.9W	345	2700-6500K	220-240V	50-60Hz
4L1/2217	5056144254187	Matt White GU10	4.9W	345	2700-6500K	220-240V	50-60Hz
4L1/2218	5056144254194	Satin Chrome GU10	4.9W	345	2700-6500K	220-240V	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

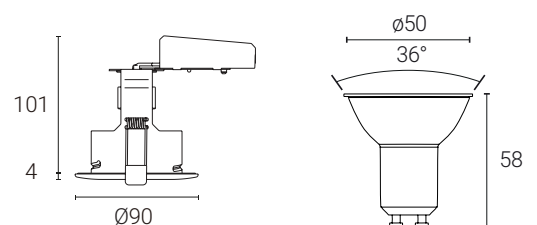



Under Cabinets



29. LED Under Cabinet Linklight

30. LED Circular Under Cabinet

32. LED Triangular Under Cabinet

Under Cabinets



LED Under Cabinet Linklight

Suitable
for use in:

- Kitchen
- Hospitality

Features




- **High performance LED undercabinet linklight.**
- **Suitable for domestic and commercial applications.**
- **Design allows for continuous linking of products.**
- **LED lifespan L70 25,000 hours.**

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A
4L1/1000/3	5056144220830	LED Linklight - 310mm	4W	376	3000K	220-240V	50-60Hz	310mm
4L1/1001/3	5056144220847	LED Linklight - 570mm	7W	658	3000K	220-240V	50-60Hz	570mm
4L1/1002/3	5056144220854	LED Linklight - 870mm	9W	884	3000K	220-240V	50-60Hz	870mm
4L1/1003/3	5056144220861	LED Linklight - 1170mm	14W	1422	3000K	220-240V	50-60Hz	1170mm
4L1/1000/4	5056144223350	LED Linklight - 310mm	4W	394	4000K	220-240V	50-60Hz	310mm
4L1/1001/4	5056144223367	LED Linklight - 570mm	7W	702	4000K	220-240V	50-60Hz	570mm
4L1/1002/4	5056144223374	LED Linklight - 870mm	9W	975	4000K	220-240V	50-60Hz	870mm
4L1/1003/4	5056144223381	LED Linklight - 1170mm	14W	1488	4000K	220-240V	50-60Hz	1170mm
4L1/1000/4	5056144216444	Linklight lead - 300mm						



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Under Cabinets



4L1/1200



4L1/1201

LED Circular Under Cabinet

Suitable
for use in:

- Kitchen
- Hospitality

Features




- **Low profile mains surface mounted circular cabinet light.**
- **AC LED ensures fast and easy installation without the need for a driver.**
- **Pre-wired with 1.5 metres mains cable.**
- **LED lifespan L70 54,000 hours.**

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/1200	5056144219735	LED Circular Undercabinet White	2W	132	4000K	220-240V	50-60Hz
4L1/1201	5056144219742	LED Circular Undercabinet Silver	2W	132	4000K	220-240V	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

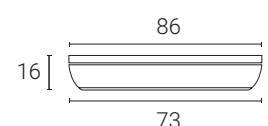





Under Cabinets



4L1/1210/3



4L1/1210/4

LED Triangular Under Cabinet

Suitable
for use in:

- Kitchen
- Hospitality

Features




- **Low profile mains surface mounted circular cabinet light.**
- **AC LED ensures fast and easy installation without the need for a driver.**
- **Pre-wired with 1.5 metres mains cable.**
- **LED lifespan L70 54,000 hours.**

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/1210/3	5056144219773	LED Triangular Undercabinet Satin Chrome	2W	102	3000K	220-240V	50-60Hz
4L1/1210/4	5056144219780	LED Triangular Undercabinet Satin Chrome	2W	112	4000K	220-240V	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Pendants



- | | |
|--|--|
| 35. LED Filament Pendant | 48. Smart Single Pendant with G125 LED Smart lamp |
| 36. Decorative 3 Light Bar Pendant | 50. Smart Single Pendant with ST64 LED Smart lamp |
| 38. Decorative 3 Light Ceiling Pendant | 52. 3 Light Bar Pendant with G125 LED Smart lamp |
| 40. Decorative Bird Cage | 54. 3 Light Plate Pendant with G125 LED Smart lamp |
| 42. Decorative Bell Cage | 56. Bird Cage Pendant with ST64 LED Smart lamp |
| 44. Decorative Globe Cage | 58. Pear Cage Pendant with ST64 LED Smart lamp |
| 46. Decorative Pear Cage | |

Pendants



LED Filament Circular Pendant

Suitable
for use in:


- Kitchen
- Bedroom
- Dining Room
- Bar
- Hotel
- Restaurant

Features



- Decorative vintage pendant design suitable for residential, hotel or restaurant applications.
- Supplied with either G125 or ST64 LED amber coated filament lamp and suspension accessory.
- LED lifespan L70 15,000 hours.
- 1.0m adjustable cable length allowing for a varied installation height.
- Triac dimmable as standard.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/7200	5056144220212	G125 Filament Pendant - Blackened Silver	7.5W	690	2500K	220-240V	50-60Hz
4L1/7201	5056144219063	G125 Filament Pendant - Antique Brass	7.5W	690	2500K	220-240V	50-60Hz
4L1/7202	5056144219070	ST64 Filament Pendant - Blackened Silver	7.5W	645	2500K	220-240V	50-60Hz
4L1/7203	5056144219087	ST64 Filament Pendant - Antique Brass	7.5W	645	2500K	220-240V	50-60Hz

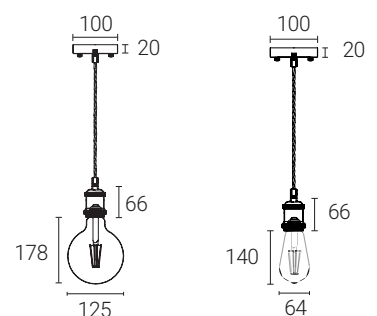

Pendants



Decorative 3 Light Bar Ceiling Pendant

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Hotel
- Restaurant

Features

Compliance


Specification



(Lamp not included)

- Bar triple pendant in blackened silver or antique brass finish.
- Fully adjustable 1.5m fabric cable.
- Suitable for use with E27 lamps.
- Perfect for use in kitchen areas and living spaces.

SKU Code	EAN	Description
4L1/7007	5056144251964	3 Circle Pendant - Blackened Silver Less Lamp
4L1/7008	5056144251971	3 Circle Pendant - Antique Brass Less Lamp

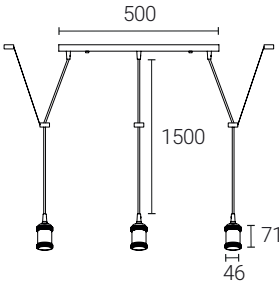

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty





Pendants



4L1/7005



4L1/7006

Decorative 3 Light Circular Ceiling Pendant

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Hotel
- Restaurant

Features

Compliance


Specification



(Lamp not included)

- Bar triple pendant in blackened silver or antique brass finish.
- Fully adjustable 1.5m fabric cable.
- Suitable for use with E27 lamps.
- Perfect for use in kitchen areas and living spaces.

SKU Code	EAN	Description
4L1/7005	5056144251940	3 Circle Pendant - Blackened Silver Less Lamp
4L1/7006	5056144251957	3 Circle Pendant - Antique Brass Less Lamp

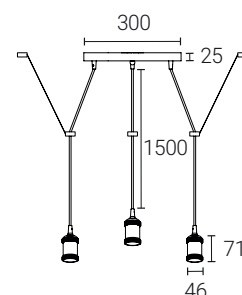

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Pendants



Decorative Bird Cage

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Hotel
- Restaurant

Features

Compliance


Specification



(Lamp not included)

- **Decorative bird cage metal pendant in matt black finish.**
- **Fully adjustable 1.5m fabric cable.**
- **Suitable for use with E27 lamps.**
- **Perfect for use in kitchen areas and living spaces.**

SKU Code	EAN	Description
4L1/7013	5056144251919	Cage Pendant - Matt Black Less Lamp

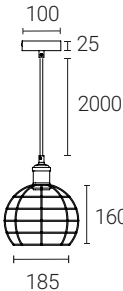

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty





Pendants



Decorative Bell Cage

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Hotel
- Restaurant

Features

Compliance


Specification



(Lamp not included)

- **Decorative bell shaped metal cage pendant in matt black finish.**
- **Fully adjustable 1.5m fabric cable.**
- **Suitable for use with E27 lamps.**
- **Perfect for use in kitchen areas and living spaces.**

SKU Code	EAN	Description
4L1/7012	5056144251902	Cage Pendant - Matt Black Less Lamp

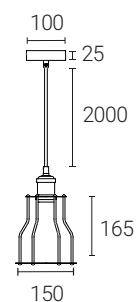

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Pendants



Decorative Globe Cage

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Hotel
- Restaurant

Features



(Lamp not included)

- **Decorative globe shaped metal cage pendant in matt black finish.**
- **Fully adjustable 1.5m fabric cable.**
- **Suitable for use with E27 lamps.**
- **Perfect for use in kitchen areas and living spaces.**

Compliance

Specification

SKU Code


EAN

Description

4L1/7011

5056144251896

Cage Pendant - Matt Black Less Lamp

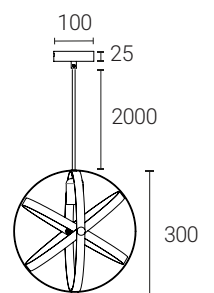

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Pendants



Pendants



Decorative Pear Cage

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Hotel
- Restaurant

Features

Compliance


Specification



(Lamp not included)

- **Decorative pear shaped metal cage pendant in matt black finish.**
- **Fully adjustable 1.5m fabric cable.**
- **Suitable for use with E27 lamps.**
- **Perfect for use in kitchen areas and living spaces.**

SKU Code	EAN	Description
4L1/7010	5056144251872	Cage Pendant - Matt Black Less Lamp

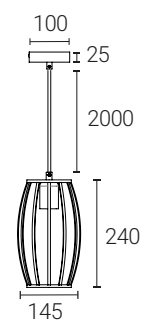

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Supplied with Smart G125 LED filament lamp

Pendants



Connected by
wiz



Single Pendant Blackened Silver with Amber G125 **LED Smart Lamp**

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Boutique Hotel
- Restaurant

Features

Compliance


Specification



- **Decorative vintage pendant design with tuneable and dimmable filament G125 lamp.**
- **Supplied with G125 LED amber coated filament lamp and suspension accessory.**
- **Wi-Fi - works with a standard Wi-Fi router.**
- **1.5m adjustable cable length allowing for a varied installation height.**
- **Control your lights wirelessly and remotely with the WiZ App.**
- **Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.**
- **IFTTT compatible.**
- **LED lamp 6.5W - equivalent to 50W.**
- **LED Lifespan L70 15,000 hours.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/7004	5056144251933	Vintage Pendant inc.E27 G125 - Amber	6.5W	725	2700-4500K	50-60Hz	220-240V

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

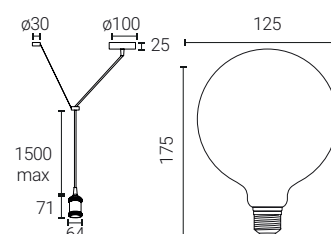






Supplied with Smart ST64 LED filament lamp

Pendants



Connected by
WIZ



Single Pendant Blackened Silver with Amber ST64 Filament **LED Smart Lamp**

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Boutique Hotel
- Restaurant

Features

Compliance


Specification



- **Decorative vintage pendant design with tuneable and dimmable filament ST64 lamp.**
- **Supplied with ST64 LED amber coated filament lamp and suspension accessory.**
- **Wi-Fi - works with a standard Wi-Fi router.**
- **1.5m adjustable cable length allowing for a varied installation height.**
- **Control your lights wirelessly and remotely with the WIZ App.**
- **Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.**
- **IFTTT compatible.**
- **LED lamp 6.5W - equivalent to 50W.**
- **LED Lifespan L70 15,000 hours.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/7003	5056144251926	Vintage Pendant inc. E27 ST64 - Amber	6.5W	720	2700-6500K	50-60Hz	220-240V

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

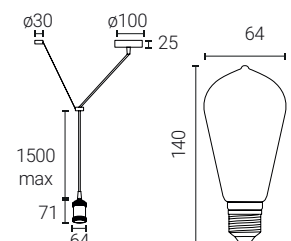

Supplied with 3x Smart G125 LED filament lamp

Pendants



Connected by
wiz



3 Light Bar Pendant Blackened Silver with Amber G125 **LED Smart Lamp**

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Boutique Hotel
- Restaurant

Features

Compliance


Specification



- Decorative vintage industrial style design 3-way bar pendant.
- Supplied with 3 x G125 LED amber coated filament lamps and suspension accessory.
- Wi-Fi - works with a standard Wi-Fi router.
- 1.5m adjustable cable length allowing for a varied installation height.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- IFTTT compatible.
- LED lamp 6.5W - equivalent to 54W.
- LED Lifespan L70 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/7017	5056144252596	3 Bar Pendant inc. 3 x E27 G125 - Amber	3 x 6.5W	3 x 725	2000-4500K	50-60Hz	220-240V

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

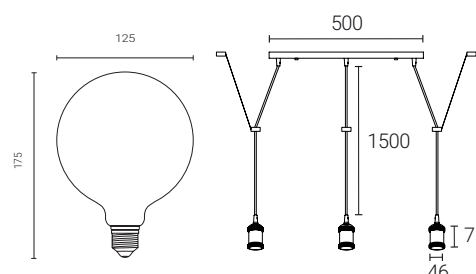





Supplied with 3x Smart G125 LED filament lamp

Pendants



Connected by
WIZ



3 Light Plate Pendant Blackened Silver with Amber G125 Filament **LED Smart Lamp**

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Boutique Hotel
- Restaurant

Features


Compliance

Specification



- **Decorative vintage industrial style design 3-way plate pendant.**
- **Supplied with 3 x G125 LED amber coated filament lamps and suspension accessory.**
- **Wi-Fi - works with a standard Wi-Fi router.**
- **1.5m adjustable cable length allowing for a varied installation height.**
- **Control your lights wirelessly and remotely with the WIZ App.**
- **Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.**
- **IFTTT compatible.**
- **LED lamp 6.5W - equivalent to 54W.**
- **LED Lifespan 15,000 hours.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/7016	5056144252589	3 Circular Pendant inc. 3 x E27 G125 - Amber	3 x 6.5W	3 x 725	2000-4500K	50-60Hz	220-240V

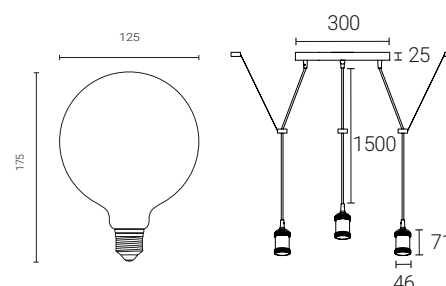


* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Supplied with Smart ST64 LED filament lamp

Pendants



Connected by
wiz



Bird Cage Pendant with Amber ST64 LED Smart Lamp

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Boutique Hotel
- Restaurant

Features


Compliance

Specification



- Stylish round metal cage with tuneable and dimmable filament amber ST64 lamp.
- Supplied with ST64 LED amber coated filament lamp and suspension accessory.
- Wi-Fi - works with a standard Wi-Fi router.
- 1.5m adjustable cable length allowing for a varied installation height.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- IFTTT compatible.
- LED lamp 6.5W - equivalent to 50W.
- LED Lifespan 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/7015	5056144252619	Bird Cage Pendant inc. E27 ST64 - Amber	6.5W	720	2000-4500K	50-60Hz	220-240V

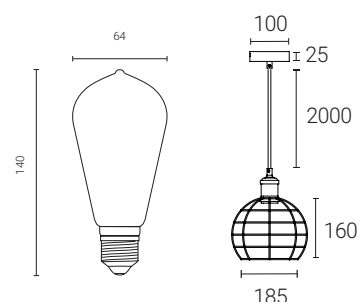

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty






Supplied with Smart ST64 LED filament lamp

Pendants



Connected by
wiz



Pear Cage Pendant with Amber ST64 Filament **LED Smart Lamp**

Suitable
for use in:

- Kitchen
- Bedroom
- Dining Room
- Bar
- Boutique Hotel
- Restaurant

Features

Compliance


Specification



- Stylish metal cage with tuneable and dimmable filament amber ST64 lamp.
- Supplied with ST64 LED amber coated filament lamp and suspension accessory.
- Wi-Fi - works with a standard Wi-Fi router.
- 1.5m adjustable cable length allowing for a varied installation height.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- IFTTT compatible.
- LED lamp 6.5W - equivalent to 50W.
- LED Lifespan 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/7014	5056144252602	Pear Cage Pendant inc. E27 ST64 - Amber	6.5W	720	2000-4500K	50-60Hz	220-240V

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

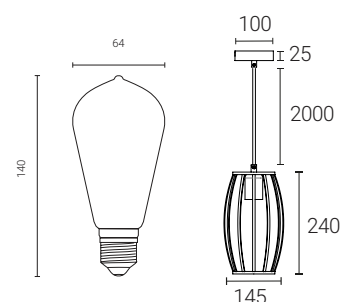

Garden Spikes, Ingrounds and Wall Lights



61. LED Spike Light

62. LED Spike Light GU10

64. Smart LED Spike Light GU10

66. LED Inground

68. LED Die-cast Wall Light

70. Smart LED Outdoor Up and Down Wall Light

72. Smart LED Outdoor Modern Exterior Wall

74. Light LED Decorative Lantern & PIR

76. LED Half Wall Lantern & PIR

78. Decorative Half Lantern & PIR

80. Decorative Lantern & PIR



4L2/2001 - Spike mounted



4L2/2001 - Surface mounted

LED Spike Light

Suitable
for use in: Garden

Features




- Multi purpose LED garden spotlight supplied with wall mounting bracket and spike.
- Pre-wired with 1.4 metres of rubber insulated cable.
- Powder coated die-cast aluminium body ensures maximum product endurance.
- LED lifespan L80 50,000 hours.

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/2001	5056144220984	LED Spike Light	5W	225	4000K	220-240V	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty





4L2/2000 - Spike mounted



4L2/2000 - Surface mounted

Spike Light GU10

Suitable
for use in: Garden

Features

Compliance


Specification



- Multi purpose garden spotlight supplied with wall mounting bracket and spike.
- Pre-wired with 1.4 metres of rubber insulated cable.
- Powder coated die-cast aluminium body ensures maximum product endurance.
- Suitable for GU10 LED lamps only.

SKU Code	EAN	Description	Wattage	Input	Hertz
4L2/2000	5056144220984	LED Spike Light GU10	5W	220-240V	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty







Supplied with Smart Wi-Fi and
Bluetooth GU10 LED lamp

Garden Spikes, Ingrounds & Wall Lights



Connected by
WIZ



4L2/2010 - Spike mounted



4L2/2010 - Surface mounted

Smart LED Spike Light GU10

Suitable
for use in: Garden

Features



Compliance




Specification



- Multi-purpose smart LED garden spotlight supplied with wall mounting bracket and spike.
- Pre-wired with 1.4 metres of rubber insulated cable.
- Powder coated die-cast aluminium body ensures maximum product endurance.
- Supplied with Smart GU10 LED lamp Wi-Fi & Bluetooth, tuneable white and dimmable.
- Wi-Fi & Bluetooth - works with a standard Wi-Fi router.
- Control your lights wirelessly and remotely with the WiZ App.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- IFTTT compatible.
- LED lamp 4.9W - equivalent to 50W.
- LED Lifespan 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/2010	5056144254354	LED Spike Light inc. GU10 Smart Lamp	4.9W	345	2200-6500K & RGB	220-240	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

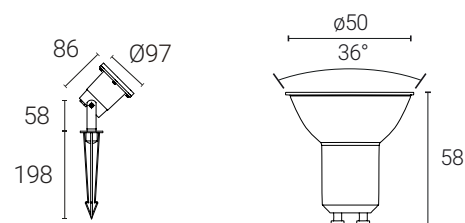



LED Inground

Suitable for use in:

- Garden
- Security Lighting

Features




- Slim design inground LED suitable for residential and commercial applications.
- Allen key screws provided as standard for security.
- Brushed stainless steel bezel ensures maximum durability.
- LED reflector and internal housing design creates a low glare light distribution.
- LED lifespan L80 50,000 hours.

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/2100	5056144220991	LED Security Light	6W	230	4000K	220-240V	50-60Hz

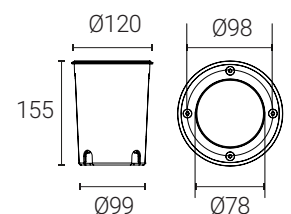

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Wall Mounted



Low Level Mounted

LED Surface Brick Light/Wall Light

Features




- Architectural low level surface brick light/wall light.
- Toughened frosted glass with die-cast aluminium housing
- Graphite textured powder coat paint finish.
- LED lifespan L70 30,000 hours.

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/6100	5056144228980	LED Wall Light	7W	302	4000K	220-240V	50-60Hz

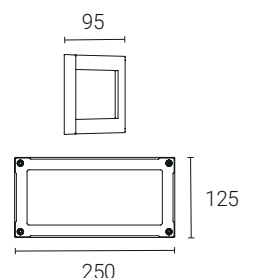

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty





LED Die-cast Wall Light

Features




- Slim modern wall light with graphite paint finish.
- Die-cast aluminium construction with polycarbonate lens ensures maximum durability.
- LED lifespan L80 50,000 hours.

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/3000	5056144221004	LED Die-cast Wall Light	8W	268	4000K	220-240V	50-60Hz



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Supplied with 2x Smart Wi-Fi and Bluetooth
GU10 LED lamps

Garden Spikes, Ingrounds & Wall Lights



Connected by
WIZ



Smart LED Outdoor Up and Down Wall Light

Suitable
for use in: Garden

Features



Compliance




Specification



- **Elegant bi-directional wall light GU10, suitable for external applications.**
- **Textured paint finish and sleek design provide a modern architectural aesthetic.**
- **Die-cast aluminium construction ensures maximum durability.**
- **Supplied with 2x Smart GU10 RGB LED lamps Wi-Fi & Bluetooth, tuneable white and dimmable.**
- **Wi-Fi & Bluetooth - works with a standard Wi-Fi router.**
- **Control your lights wirelessly and remotely with the WIZ App.**
- **Can be controlled via the WIZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.**
- **IFTTT compatible.**
- **LED lamp 4.9W - equivalent to 50W.**
- **LED Lifespan 15,000 hours.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/2305	5056144254347	Bi-directional Wall inc. GU10 Smart Lamp	4.9W	345	2200-6500K & RGB	220-240	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

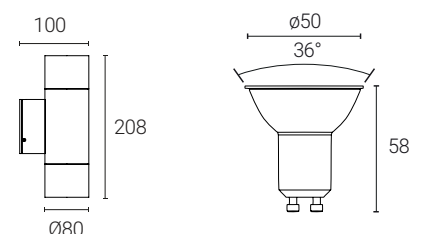







Smart LED Outdoor Modern Exterior Wall Light

Suitable
for use in: Garden

Features


Compliance

Specification



- Contemporary box style exterior wall light.
- Die cast aluminium construction with tempered glass enclosure.
- Textured powder coated anthracite finish.
- Supplied with Smart Wi-Fi A60 LED filament lamp tuneable white and dimmable.
- Wi-Fi - works with a standard Wi-Fi router.
- Control your lights wirelessly and remotely with the WiZ app.
- Can be controlled via the WiZ App and voice controlled smart devices: Hey Google, Alexa, Siri, Samsung SmartThings.
- IFTTT compatible.
- LED lamp 6.5W - equivalent to 50W.
- LED Lifespan 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/6102	5056144251889	Outdoor Wall Light inc. A60 Smart Lamp	6.5W	720	2200-6500K & RGB	220-240V	50Hz

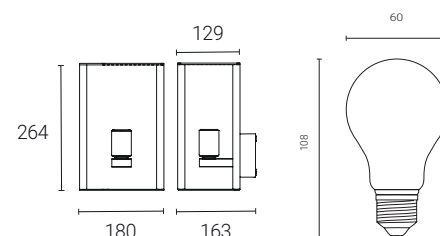



4L2/3414



4L2/3415

LED Decorative Lantern & PIR

Suitable
for use in:

- Home exterior
- Garden

Features




- Modern IP65 LED lantern.
- Corrosion resistant polycarbonate finish.
- Uniform light output.
- Option of PIR sensor for added security.
- Operating temperature -10 ° to 40 °
- LED Lifespan L70 60,000 hours.

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/3414	5056144268160	LED Decorative Lantern	8W	650	3000K	220-240V	50-60Hz
4L2/3415	5056144268177	LED Decorative Lantern PIR	8.5W	650	3000K	220-240V	50-60Hz

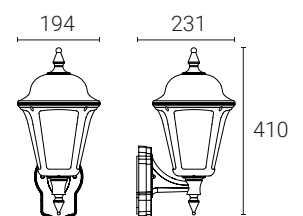

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty







4L2/3412



4L2/3413

Decorative Lantern & PIR

Suitable
for use in:

- Home exterior
- Garden


Features



- Modern IP65 half lantern.
- Corrosion resistant polycarbonate finish .
- Option of PIR sensor for added security.
- Choice of top arm or bottom arm mounting making it installer friendly without the need for additional wiring (PIR version bottom arm mounting only).
- Suitable for E27 lamp.

SKU Code	EAN	Description
4L2/3412	5056144268146	Decorative Lantern
4L2/3413	5056144268153	Decorative Lantern PIR

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

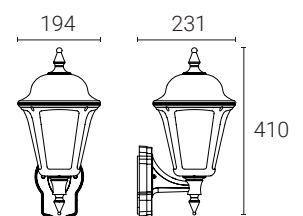



4L2/3416



4L2/3417

LED Half Wall Lantern & PIR

Suitable
for use in:

- Home exterior
- Garden

Features

Compliance


Specification



- Modern IP65 LED lantern.
- Corrosion resistant polycarbonate finish.
- Uniform light output.
- Option of PIR sensor for added security.
- Operating temperature -10 ° to 40 °
- LED Lifespan L70 60,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/3416	5056144268184	LED Decorative Half Lantern	8W	650	3000K	220-240V	50-60Hz
4L2/3417	5056144268191	LED Decorative Half Lantern PIR	8.5W	650	3000K	220-240V	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

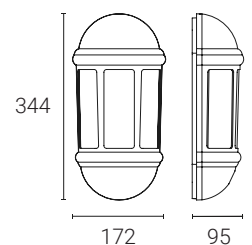







4L2/3410



4L2/3411

Decorative Half Lantern & PIR

Suitable
for use in:

- Home exterior
- Garden

Features


Compliance

Specification



- Modern IP65 half lantern.
- Corrosion resistant polycarbonate finish .
- Option of PIR sensor for added security.
- Suitable for E27 lamp.

SKU Code	EAN	Description
4L2/3410	5056144268122	Decorative Half Lantern
4L2/3411	5056144268139	Decorative Half Lantern PIR

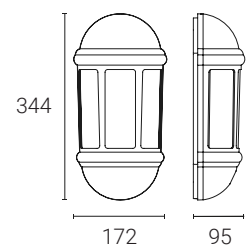

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Festoon & Lanterns



- 83. LED Festoon Lights
- 84. LED Festoon Light Holders
- 86. LED Portable Lanterns



LED Festoon Lights

Suitable for use in:

- Garden
- Hospitality

Features

Compliance

Specification








- Heavy duty festoon lights .
- Outstanding durability .
- Weather-proof materials for all year-round use.
- Available in 11.5m and 20m length. 1m distance between lamps.
- Comes complete with E27 Warm White LED lamps (2700K).
- Flexible mounting options, mount on a flat surface or suspend from above (hardware not provided).
- 4L2/8000 - 11.5m kit with 10 lamps (plus 2 spare), linkable up to 20 sets.
- 4L2/8001 - 20M with 20 lamps (plus 2 spare), linkable up to 10 sets.
- LED Lifespan L70 20,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/8000	5056144263004	Festoon Lighting Integrated LED 11.5M	20W	160	2700K	220-240V	50-60Hz
4L2/8001	5056144261840	Festoon Lighting Integrated LED 20M	30W	160	2700K	220-240V	50-60Hz

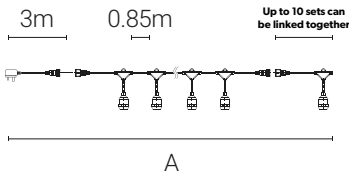

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Festoon Light Holders

Suitable
for use in:

- Garden
- Hospitality

Features

Compliance

Specification




(Lamp not included)



- Heavy duty festoon lamp holders.
- Outstanding durability.
- Weather-proof materials for all year-round use.
- Available in 11.5m and 20m length. 1m distance between lamps.
- Compatible with E27 LED lamp (not included) only.
- Flexible mounting options, mount on a flat surface or suspend from above (hardware not provided).
- 4L2/8002 - 11.5m kit with 10 lamps (plus 2 spare), linkable up to 20 sets, suitable for LED lamps only.
- 4L2/8003 - 20M with 20 lamps (plus 2 spare), linkable up to 10 sets, suitable for LED lamps only.

SKU Code	EAN	Description
4L2/8002	5056144263011	Festoon Lighting E27 Lamp Holders 11.5M
4L2/8003	5056144261864	Festoon Lighting E27 Lamp Holders 20M

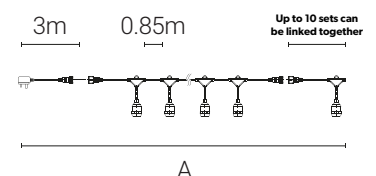

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty







1 Touch: 10%
2 Touches: 50%
3 Touches: 100%
4 Touches: Off



4L2/4100



4L2/4101

LED Portable Lanterns

Suitable
for use in: Garden

Features



4L2/4101 only




Compliance

Specification

- Modern die-cast aluminium LED lanterns suitable for domestic applications.
- Battery powered and charged using USB 2.0 meaning no installation is required, is maintenance free and is completely portable.
- Wireless integrated speaker allows audio playback using bluetooth connectivity between lantern and smart device (4L2/4101 only).
- Multi-level touch switch allows end user option of different light dimming options. (4L2/4100 only).
- L70 36,000 hours average lifetime.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/4100	5056144225248	LED Square Portable Lantern	5W	320	4000K	3.7V	DC
4L2/4101	5056144225255	LED Rectangle Portable Lantern	6W	320	4000K	3.7V	DC

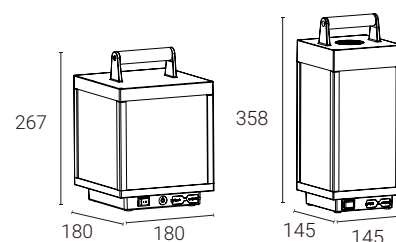

Solar Wall Lights, Solar Bollards & Bollards



- 89. LED Solar Bollard
- 90. LED Solar Wall Light
- 92. LED Rectangular Solar Bollard
- 93. LED Rectangular Wall Light
- 94. LED Circular Solar Bollard
- 95. LED Circular Solar Wall Light
- 96. LED Domestic Bollard

Sensing Distance: Max 10m
Time: 8 seconds - 8 minutes
LUX: 10 Lux - 70 Lux



LED Solar Bollard

Suitable
for use in: Garden

Features

Compliance

Specification




- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- Rotatable head design which can swing in $\pm 90^\circ$ allowing for a varied range of installation options.
- PIR motion sensor modes:
- Mode 1: 15% output after sunset, motion detected 100% output, no motion 15% output for 15 hours.
- Mode 2: Motion detected 100% light output, no motion off.
- LED lifespan L70 36,000 hours.

SKU Code	EAN	Description	Lumens	CCT	Input	Hertz
4L2/6001	5056144219056	LED Solar Bollard	165	4000K	3.7V	DC

Solar products will not work optimally straight out of the box without being charged by full sunlight. Once the fitting has been recharged, we recommend in Winter months the product is set to PIR motion sensor, as the sunlight is not sufficient to support continuous battery use through the night.

* Product is 4 year warranty. Battery is 2 year warranty.
This is an extended warranty that requires registration.

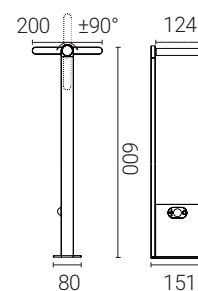

PIR Sensor

Solar Wall Lights, Solar Bollards & Bollards

Sensing Distance: Max 10m
Time: 8 seconds - 8 minutes
LUX: 10 Lux - 70 Lux



LED Solar Wall Light

Suitable
for use in: Garden

Features

Compliance

Specification




- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- Rotatable head design which can swing in $\pm 90^\circ$ allowing for a varied range of installation options.
- PIR motion sensor modes:
- Mode 1: 15% output after sunset, motion detected 100% output, no motion 15% output for 15 hours.
- Mode 2: Motion detected 100% light output, no motion off.
- LED lifespan L70 36,000 hours.

SKU Code	EAN	Description	Lumens	CCT	Input	Hertz
4L2/6000	5056144219049	LED Solar Wall Light	165	4000K	3.7V	DC

Solar products will not work optimally straight out of the box without being charged by full sunlight. Once the fitting has been recharged, we recommend in Winter months the product is set to PIR motion sensor, as the sunlight is not sufficient to support continuous battery use through the night.

* Product is 4 year warranty. Battery is 2 year warranty.
This is an extended warranty that requires registration.

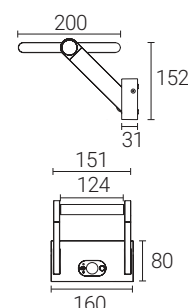



PIR Sensor

Sensing Distance: 6m -10m
Time: 1 minute
LUX: 10 Lux - 45 Lux

Solar Wall Lights, Solar Bollards & Bollards



LED Rectangular Solar Bollard

Suitable
for use in: Garden

Features

Compliance

Specification




- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- Rotatable head design which can swing in $\pm 90^\circ$ allowing for a varied range of installation options.
- PIR motion sensor modes:
- Mode 1: 15% output after sunset, motion detected 100% output, no motion 15% output for 15 hours.
- Mode 2: Motion detected 100% light output, no motion off.
- LED lifespan L70 36,000 hours.

SKU Code	EAN	Description	Lumens	CCT	Input	Hertz
4L2/6005	5056144229048	LED Rectangular Solar Bollard	230	4000K	7.4V	DC

Solar products will not work optimally straight out of the box without being charged by full sunlight. Once the fitting has been recharged, we recommend in Winter months the product is set to PIR motion sensor, as the sunlight is not sufficient to support continuous battery use through the night.

* Product is 4 year warranty. Battery is 2 year warranty.
This is an extended warranty that requires registration.

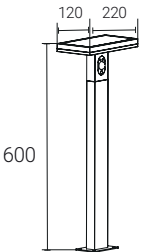

Sensing Distance: 6m -10m
Time: 1 minute
LUX: 10 Lux - 45 Lux



LED Rectangular Solar Wall Light

Suitable
for use in: Garden

Features

Compliance

Specification




- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- Rotatable head design which can swing in $\pm 90^\circ$ allowing for a varied range of installation options.
- PIR motion sensor modes:
- Mode 1: 15% output after sunset, motion detected 100% output, no motion 15% output for 15 hours.
- Mode 2: Motion detected 100% light output, no motion off.
- LED lifespan L70 36,000 hours.

SKU Code	EAN	Description	Lumens	CCT	Input	Hertz
4L2/6004	5056144229031	LED Rectangular Solar Wall Light	230	4000K	7.4V	DC

Solar products will not work optimally straight out of the box without being charged by full sunlight. Once the fitting has been recharged, we recommend in Winter months the product is set to PIR motion sensor, as the sunlight is not sufficient to support continuous battery use through the night.

* Product is 4 year warranty. Battery is 2 year warranty.
This is an extended warranty that requires registration.

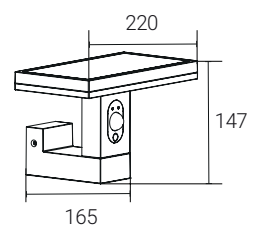

PIR Sensor

Sensing Distance: 6m -10m
Time: 1 minute
LUX: 10 Lux - 45 Lux

Solar Wall Lights, Solar Bollards & Bollards



LED Circular Solar Bollard

Suitable
for use in: Garden

Features

Compliance

Specification




- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- PIR motion sensor modes:
- Mode 1: 11% output after sunset, motion detected 100% output, no motion 11% for 20 hours.
- Mode 2: Motion detected 100% output, no motion off.
- LED lifespan L70 36,000 hours.

SKU Code	EAN	Description	Lumens	CCT	Input	Hertz
4L2/6003	5056144229024	LED Circular Solar Bollard	210	4000K	7.4V	DC

Solar products will not work optimally straight out of the box without being charged by full sunlight. Once the fitting has been recharged, we recommend in Winter months the product is set to PIR motion sensor, as the sunlight is not sufficient to support continuous battery use through the night.

* Product is 4 year warranty. Battery is 2 year warranty.
This is an extended warranty that requires registration.

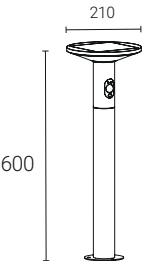

PIR Sensor

Solar Wall Lights, Solar Bollards & Bollards

Sensing Distance: 6m -10m
Time: 1 minute
LUX: 10 Lux - 45 Lux



LED Circular Solar Wall Light

Suitable
for use in: Garden

Features

Compliance

Specification




- Modern die-cast solar powered aluminium LED bollard suitable for domestic applications.
- Graphite textured powder coat paint finish provides enhanced durability.
- PIR motion sensor modes:
- Mode 1: 11% output after sunset, motion detected 100% output, no motion 11% for 20 hours.
- Mode 2: Motion detected 100% output, no motion off.
- LED lifespan L70 36,000 hours.

SKU Code	EAN	Description	Lumens	CCT	Input	Hertz
4L2/6002	5056144229017	LED Circular Solar Wall Light	210	4000K	7.4V	DC

Solar products will not work optimally straight out of the box without being charged by full sunlight. Once the fitting has been recharged, we recommend in Winter months the product is set to PIR motion sensor, as the sunlight is not sufficient to support continuous battery use through the night.

* Product is 4 year warranty. Battery is 2 year warranty.
This is an extended warranty that requires registration.







4L2/4000



4L2/4001



LED Domestic Bollard

Suitable
for use in:

- Garden
- Pathways

Features



- Slim modern bollard with graphite paint finish.
- Die-cast aluminium construction with polycarbonate lens ensures maximum durability
- LED lifespan L80 50,000 hours.

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/4000	5056144221028	LED Bollard 700mm	8W	268	4000K	220-240V	50-60Hz
4L2/4001	5056144221035	LED Bollard 900mm	8W	268	4000K	220-240V	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Floodlights & Security Lights



- 99. LED Die-cast Floodlight
- 100. LED Die-cast Floodlight PIR
- 102. LED Floodlight
- 104. LED Floodlight PIR
- 106. LED Floodlight
- 108. LED Floodlight PIR
- 110. LED Security Light



LED Die-cast Floodlight

Suitable for use in:

- Garden
- Security Lighting

Features


Compliance

Specification



- Contemporary and slim architectural LED floodlight suitable for a range of applications.
- Textured diffuser design provides excellent light uniformity.
- Die-cast aluminium construction ensures durability and strength.
- LED lifetime L70 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A	B	C
4L2/1000	5056144220878	Die-Cast Flood	10W	885	4000K	220-240V	50-60Hz	110mm	100mm	27mm
4L2/1001	5056144220885	Die-Cast Flood	20W	1581	4000K	220-240V	50-60Hz	130mm	117mm	28mm
4L2/1002	5056144220892	Die-Cast Flood	30W	2475	4000K	220-240V	50-60Hz	170mm	145mm	36mm
4L2/1003	5056144220908	Die-Cast Flood	50W	3992	4000K	220-240V	50-60Hz	240mm	200mm	37mm

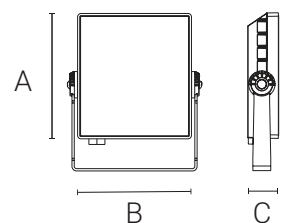

Sensing Distance: 0m~8m
Time: 5 ±20 seconds
LUX: Day>30 Lux - Night<5 Lux



LED Die-cast Floodlight PIR

Suitable for use in: • Garden • Security Lighting

Features


Compliance

Specification



- Contemporary and slim architectural LED floodlight suitable for a range of applications.
- PIR offers convenience and security
- Textured diffuser design provides excellent light uniformity.
- Die-cast aluminium construction ensures durability and strength.
- LED lifetime L70 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A	B	C
4L2/1004	5056144220915	Die-Cast Flood PIR	10W	885	4000K	220-240V	50-60Hz	110mm	100mm	41mm
4L2/1005	5056144220922	Die-Cast Flood PIR	20W	1581	4000K	220-240V	50-60Hz	130mm	117mm	42mm
4L2/1006	5056144220939	Die-Cast Flood PIR	30W	2475	4000K	220-240V	50-60Hz	170mm	145mm	50mm
4L2/1007	5056144220946	Die-Cast Flood PIR	50W	3992	4000K	220-240V	50-60Hz	240mm	200mm	51mm

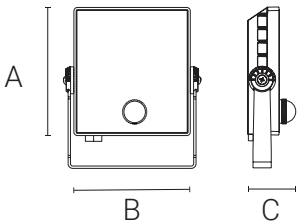







LED Floodlight

Suitable for use in:

- Garden
- Security Lighting

Features




- IP65 rated floodlight for external application.
- PIR option available (IP44 only), perfect for security lighting.
- Pre-wired with 1m cable.
- Aluminium body ensures durability.
- Bracket design allows installation without removing mounting bracket.
- Compact.
- LED lifetime L70 30,000 hours.

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A	B	C
4L2/1010	5056144261727	LED Floodlight	10W	850	4000K	220-240V	50-60Hz	67mm	92mm	27mm
4L2/1011	5056144261734	LED Floodlight	20W	1700	4000K	220-240V	50-60Hz	77mm	112mm	28mm
4L2/1012	5056144261741	LED Floodlight	30W	2550	4000K	220-240V	50-60Hz	97mm	137mm	28mm
4L2/1013	5056144261758	LED Floodlight	50W	4250	4000K	220-240V	50-60Hz	134mm	189mm	28mm

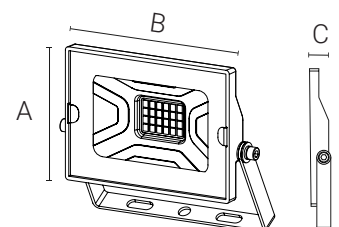



LED Floodlight PIR

Suitable for use in:

- Garden
- Security Lighting

Features

Compliance

Specification



Body




PIR Sensor



- **IP65 rated floodlight for external application.**
- **PIR option available (IP44 only), perfect for security lighting.**
- **Pre-wired with 1m cable.**
- **Aluminium body ensures durability.**
- **Bracket design allows installation without removing mounting bracket.**
- **Compact.**
- **LED lifetime L70 30,000 hours.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A	B	C
4L2/1014	5056144261765	LED Floodlight	10W	850	4000K	220-240V	50-60Hz	122mm	62mm	57mm
4L2/1015	5056144261772	LED Floodlight	20W	1700	4000K	220-240V	50-60Hz	133mm	112mm	58mm
4L2/1016	5056144261789	LED Floodlight	30W	2550	4000K	220-240V	50-60Hz	152mm	137mm	58mm
4L2/1017	5056144261796	LED Floodlight	50W	4250	4000K	220-240V	50-60Hz	188mm	189mm	58mm

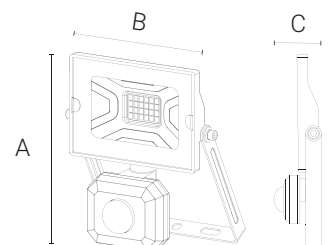







LED Floodlight

Suitable for use in:

- Garden
- Security Lighting

Features


Compliance

Specification



- Professional IP65 rated floodlight for external applications.
- PIR option available, perfect for security lighting
- Pre-wired with 1m cable.
- Full range of wattages to cover a number of applications (from low output for gardens and security, to high output for outside storage and car parks).
- Die-cast aluminium construction ensures durability and strength.
- LED lifetime L70 50,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A	B	C
4L2/1020	5056144261802	LED Floodlight	10W	1050	4000K	220-240V	50-60Hz	100mm	90mm	31mm
4L2/1021	5056144261819	LED Floodlight	20W	2100	4000K	220-240V	50-60Hz	110mm	95mm	33mm
4L2/1022	5056144261826	LED Floodlight	30W	3150	4000K	220-240V	50-60Hz	125mm	110mm	33.5mm
4L2/1023	5056144261833	LED Floodlight	50W	5750	4000K	220-240V	50-60Hz	160mm	139mm	48.6mm
4L2/1024	5056144261857	LED Floodlight	100W	11500	4000K	220-240V	50-60Hz	265mm	235mm	60mm
4L2/1025	5056144261871	LED Floodlight	150W	17250	4000K	220-240V	50-60Hz	300mm	260mm	59.9mm
4L2/1026	5056144261888	LED Floodlight	200W	23000	4000K	220-240V	50-60Hz	360mm	310mm	59.4mm



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



LED Floodlight PIR

Suitable for use in:

- Garden
- Security Lighting

Features


Compliance

Specification



- Professional IP65 rated floodlight for external applications.
- PIR option available, perfect for security lighting
- Pre-wired with 1m cable.
- Full range of wattages to cover a number of applications (from low output for gardens and security, to high output for outside storage and car parks).
- Die-cast aluminium construction ensures durability and strength.
- LED lifetime L70 50,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A	B	C
4L2/1027	5056144261895	LED Floodlight PIR	10W	1050	4000K	220-240V	50-60Hz	155.2mm	110mm	62.1mm
4L2/1028	5056144261901	LED Floodlight PIR	20W	2100	4000K	220-240V	50-60Hz	165mm	117mm	64.2mm
4L2/1029	5056144261918	LED Floodlight PIR	30W	3150	4000K	220-240V	50-60Hz	180.2mm	134.2mm	64.8mm
4L2/1030	5056144261925	LED Floodlight PIR	50W	5750	4000K	220-240V	50-60Hz	216.1mm	173.8mm	70.1mm

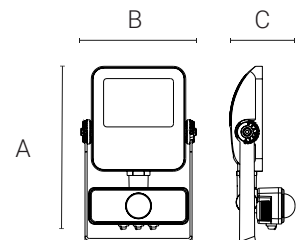

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty







LED Security Light

Features

Compliance

Specification








- Compact high brightness LED security light.
- Robust die-cast aluminium LED heat sink for optimal thermal performance with polycarbonate housing.
- Individually adjustable heads to illuminate desired location.
- Adjustable PIR direction point.
- PIR settings that can adjust the detection range, detection distance, time delay and ambient light levels.
- LED lifetime L70 15,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L2/1100	5056144220953	LED Security Light	46W	3719	4000K	230V	50Hz

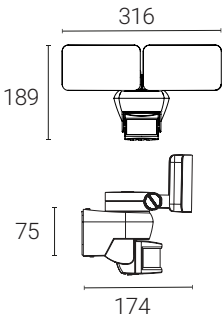

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

High Bays



113. **LED High Bay**

114. **LED High Bay**

High Bays



4L3/1203

LED High Bay

Suitable
for use in:

- Warehouse
- Factories
- Retail stores

Features




- **Low profile UFO LED high bay suitable for industrial, commercial and retail applications.**
- **IP65 ingress protection allows for a range of installation options.**
- **Die-cast powder coated body and heatsink provides excellent thermal performance and enhances LED performance.**
- **1-10V dimmable as standard.**
- **Operating temperature -30°C to 50°C.**
- **LED lifespan L80 54,000 hours.**

Compliance

Specification

SKU Code	Description	Wattage	Lumens	CCT	Input	Hertz	A
4L3/1203	LED High Bay	100W	12062	4000K	200-240V	50-60Hz	176
4L3/1204	LED High Bay	150W	17913	4000K	200-240V	50-60Hz	186
4L3/1205	LED High Bay	200W	24120	4000K	200-240V	50-60Hz	198



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

High Bays



LED High Bay

Suitable
for use in:

- Warehouse
- Factories
- Retail stores

Features

Compliance

Specification




- **Robust low profile LED high bay.**
- **Die-cast powder coated body and heatsink provides excellent thermal performance and enhances LED performance.**
- **IP65 ingress protection allows for a range of installation including factories and warehouses.**
- **Emergency and Microwave option for full control.**
- **Suitable for drop rod, jack chain and catenary wire .**
- **Pre-wired with 1M of H05RN-F cable for ease and speed of installation.**
- **Operating temperature -25°C to 40°C.**
- **LED lifespan L70 50,000 hours.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A
4L3/1206	5056144261222	LED High Bay	100W	13000	4000K	200-240V	50-60Hz	240mm
4L3/1207	5056144261260	LED High Bay	150W	19500	4000K	200-240V	50-60Hz	280mm
4L3/1208	5056144261307	LED High Bay	200W	26000	4000K	200-240V	50/60Hz	320mm
4L3/1209	5056144271696	High Bay Microwave Programmer						
4L3/1210	5056144271764	High Bay Bracket Accessories						

/EM Emergency Option

/MW Microwave Sensor Option

/EM/MW Emergency Microwave Sensor Option



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Battens



- 117. **LED Non-Corrosive**
- 118. **LED Weatherproof Batten**
- 120. **LED Surface Linear**
- 122. **LED Batten**

Battens



4L3/1103

4L3/1100

LED Non-Corrosive

Suitable
for use in:

- Carparks
- Warehouse
- Stairwells
- Corridors

Features

Compliance

Specification




- **Unique luminaire fixing clip design allows option of mounting onto BESA box.**
- **LED performance allows point-to-point replacement of existing fluorescent luminaires.**
- **Lockable heavy-duty stainless steel clips supplied as standard for added safety and security.**
- **Durable IP65 polycarbonate non-corrosive.**
- **Impressive performance, up to 7320 lumens.**
- **Operating Temperature -10° - 40°.**
- **LED lifespan L70 30,000 hrs.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A	B	C	D
4L3/1100	5056144219490	LED NCF 4 Ft Single	20W	2088	4000K	230V	50Hz	1266mm	860mm	75mm	85mm
4L3/1101	5056144219506	LED NCF 5 Ft Single	28W	3230	4000K	230V	50Hz	1566mm	960mm	75mm	85mm
4L3/1102	5056144219513	LED NCF 6 Ft Single	34W	3823	4000K	230V	50Hz	1866mm	1030mm	80mm	85mm
4L3/1103	5056144219520	LED NCF 4 Ft Twin	40W	4425	4000K	230V	50Hz	1266mm	860mm	75mm	118mm
4L3/1104	5056144219537	LED NCF 5 Ft Twin	58W	6353	4000K	230V	50Hz	1566mm	960mm	75mm	118mm
4L3/1105	5056144219544	LED NCF 6 Ft Twin	70W	7320	4000K	230V	50Hz	1866mm	1030mm	80mm	118mm

/10 Emergency Option

/11 Microwave Sensor Option

/12 Microwave Sensor Emergency Option



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

Non-Corrosives



LED Weatherproof Batten

Suitable
for use in:

- Carparks
- Warehouse
- Stairwells
- Corridors

Features


Compliance

Specification



- **Durable LED polycarbonate batten - waterproof, dust proof and corrosion proof.**
- **Impressive performance, up to 6500 lumens.**
- **Energy efficient (120 lm/W).**
- **Versatile slimline design, can be installed in factories, warehouses and garages.**
- **Easy Installation via easy wiring connectors, no screwdriver needed.**
- **Operating temperature -20°C to 50°C.**
- **LED lifespan L70 30,000 hours.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A	B
4L3/1110	5056144261659	LED Weatherproof Batten 1200mm	9W	1170	4000K	220-240v	50-60hz	1200mm	1050mm
4L3/1111	5056144261666	LED Weatherproof Batten 1500mm	25W	3125	4000K	220-240v	50-60hz	1520mm	1350mm
4L3/1112	5056144261673	LED Weatherproof Batten 1800mm	25W	3250	4000K	220-240v	50-60hz	1820mm	1650mm
4L3/1113	5056144261680	LED Weatherproof Batten Twin 600mm	18W	2340	4000K	220-240v	50-60hz	620mm	450mm
4L3/1114	5056144261697	LED Weatherproof Batten Twin 1200mm	40W	5200	4000K	220-240v	50-60hz	1200mm	1050mm
4L3/1115	5056144261703	LED Weatherproof Batten Twin 1500mm	50W	6250	4000K	220-240v	50-60hz	1520mm	1350mm
4L3/1116	5056144261710	LED Weatherproof Batten Twin 1800mm	50W	6500	4000K	220-240v	50-60hz	1820mm	1650mm



* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty





Non-Corrosives



4L3/2000

4L3/2002

4L3/2004

LED Surface Linear

Suitable
for use in:

- Utility rooms
- Garages
- Schools
- Corridors

Features




- **High specification LED batten suitable for a range of applications.**
- **Steel body construction with powder coat finish and polycarbonate end caps.**
- **Opal diffuser design optimises performance and light distribution.**
- **Operating Temperature -10° to 40°.**
- **LED lifespan L70 60,000 hours.**

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A
4L3/2000	5056144220595	LED Surface Linear 4ft	27W	2616	4000K	220-240v	50-60hz	1246mm
4L3/2001	5056144220601	LED Surface Linear 4ft	45W	4939	4000K	220-240v	50-60hz	1246mm
4L3/2002	5056144220618	LED Surface Linear 5ft	32W	3656	4000K	220-240v	50-60hz	1547mm
4L3/2003	5056144220625	LED Surface Linear 5ft	54W	6325	4000K	220-240v	50-60hz	1547mm
4L3/2004	5056144220632	LED Surface Linear 6ft	41W	4814	4000K	220-240v	50-60hz	1847mm
4L3/2005	5056144220649	LED Surface Linear 6ft	73W	8232	4000K	220-240v	50-60hz	1847mm

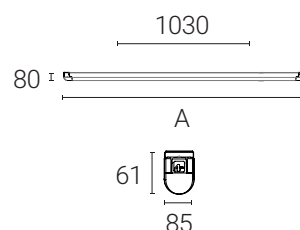

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



4L3/2010

LED Batten

Suitable
for use in:

- Utility rooms
- Garages
- Schools
- Corridors

Features


Compliance

Specification



- **Energy efficient polycarbonate LED batten.**
- **Easy installation with metal clips that attach to the body.**
- **Versatile slimline design, can be installed in commercial and industrial applications.**
- **Impressive performance, up to 4400 lumens.**
- **Operating Temperature -10° - 40°.**
- **LED lifespan L70 54,000 hours.**

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz	A
4L3/2010	5056144261628	LED Batten Twin 600mm	15W	1650	4000K	220-240v	50-60hz	600mm
4L3/2011	5056144261635	LED Batten Twin 1200mm	30W	3300	4000K	220-240v	50-60hz	1200mm
4L3/2012	5056144261642	LED Batten Twin 1500mm	40W	4400	4000K	220-240v	50-60hz	1500mm
4L3/2013	5056144267613	LED IP20 Batten Twin Daylight 600mm	15W	1650	4000K	220-240v	50-60hz	600mm
4L3/2014	5056144267620	LED IP20 Batten Twin Daylight 1200mm	30W	3300	4000K	220-240v	50-60hz	1200mm
4L3/2015	5056144267637	LED IP20 Batten Twin Daylight 1500mm	40W	4400	4000K	220-240v	50-60hz	1500mm

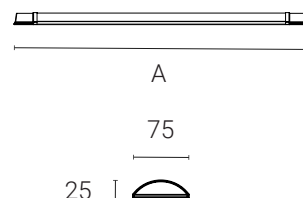

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Bulkheads



- 125. LED CCT Ceiling/Wall Light
- 126. LED CCT Circular Surface Ceiling/Wall Light
- 128. Smart Ceiling/Wall Light
- 130. Smart LED CCT Circular Surface Ceiling/Wall Light

Bulkheads



LED CCT Ceiling/Wall Light

Suitable
for use in:

- Bathroom
- Corridor
- Stairwells
- Hotels

Features

Compliance

Specification




- Ultra slim modern polycarbonate wall/ceiling light.
- Matt white or chrome trim finish.
- CCT selectable between 3000K and 4000K.
- Rear fixing bracket and terminal housing for ease of installation.
- Non-dimmable.
- Lifespan L70 54,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/3002	5056144261543	LED CCT Ceiling/Wall Light Matt White	18W	1847	3000-4000K	220-240V	50-60Hz
4L1/3003	5056144261581	LED CCT Ceiling/Wall Light Chrome	18W	1847	3000-4000K	220-240V	50-60Hz

/EM Emergency Option

/MW Microwave Sensor Option

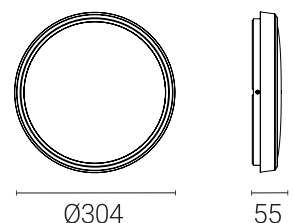

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



4L1/3320



4L1/3321

Smart LED Ceiling/Wall Light

Suitable
for use in:

- Bathroom
- Corridor
- Stairwells
- Hotels

Features




- Smart ultra slim ceiling/wall light.
- Wi-Fi & Bluetooth - works with a standard Wi-Fi router.
- Controlled via smartphone, tablet, smart sensors, smart remotes or voice control.
- Works with Alexa, Hey Google, Apple Siri, Samsung SmartThings.
- IFTTT compatible.
- Rear fixing bracket and terminal housing for ease of installation.
- LED lifespan L70 54,000 hours.

Compliance

Specification

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/3320	5056144254415	Smart LED Ceiling/Wall Light Matt White	18W	1620	2700-6500K	220-240V	50-60Hz
4L1/3321	5056144254422	Smart LED Ceiling/Wall Light Chrome	18W	1620	2700-6500K	220-240V	50-60Hz

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty

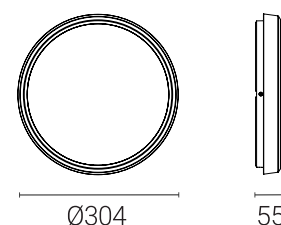





Bulkheads



LED CCT Circular Surface Ceiling/Wall Light

Suitable
for use in:

- Bathroom
- Corridor
- Stairwells
- Hotels

Features

Compliance


Specification



- Slim wall/ceiling light with contemporary aesthetic.
- All polycarbonate construction with opal diffuser.
- Matt white, chrome or graphite trim finish.
- CCT selectable between 3000K and 4000K.
- Full IP65 ingress protection rating allows a multitude of installation options.
- LED lifespan L70 60,000 hours.

SKU Code	EAN	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/3102	5056144261369	LED CTT Circular Surface White	13W	1080	3000-4000K	220-240V	50-60Hz
4L1/3103	5056144261420	LED CTT Circular Surface Chrome	13W	1080	3000-4000K	220-240V	50-60Hz
4L1/3104	5056144261482	LED CTT Circular Surface Graphite	13W	1080	3000-4000K	220-240V	50-60Hz

/EM	Emergency Option
/MW	Microwave Sensor Option

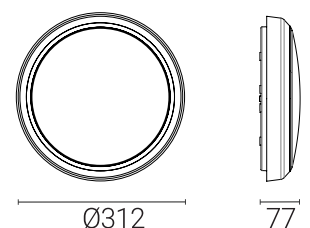

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Smart LED Circular Surface CCT Ceiling/Wall Light

Suitable
for use in:

- Bathroom
- Corridor
- Stairwells
- Hotels

Features



Compliance




Specification



- Smart slim wall/ceiling light with contemporary aesthetic.
- Wi-Fi & Bluetooth - works with a standard Wi-Fi router.
- Controlled via smartphone, tablet, smart sensors, smart remotes or voice control.
- Works with Alexa, Hey Google, Apple Siri, Samsung SmartThings.
- IFTTT compatible.
- All polycarbonate construction with opal diffuser.
- Matt white, chrome or graphite trim finish.
- Full IP65 ingress protection rating allows a multitude of installation options.
- LED lifespan L70 60,000 hours.

SKU Code	Description	Wattage	Lumens	CCT	Input	Hertz
4L1/3322	Smart LED Circular Surface White	11W	1150	2700-6500K	220-240V	50-60Hz
4L1/3323	Smart LED Circular Surface Chrome	11W	1150	2700-6500K	220-240V	50-60Hz
4L1/3324	Smart LED Circular Surface Graphite	11W	1150	2700-6500K	220-240V	50-60Hz

/EM	Emergency Option
/MW	Microwave Sensor Option

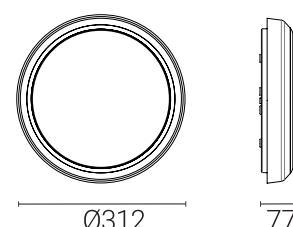

* This is an extended warranty that requires registration.
Please register at 4liteuk.com/warranty



Index

Downlights

SKU Code	Description	Page
4L1/2000/3	LED Fire Rated Downlight	16
4L1/2000/4	LED Fire Rated Downlight	16
4L1/2001	LED Fire Rated Downlight CCT Selectable	18
4L1/2005	Smart LED Fire Rated Downlight	20
4L1/2210	Smart LED Fire Rated IP65 GU10 Downlight - Matt White	22
4L1/2211	Smart LED Fire Rated IP65 GU10 Downlight - Chrome	22
4L1/2212	Smart LED Fire Rated IP65 GU10 Downlight - Satin Chrome	22
4L1/2213	Smart LED Fire Rated IP20 GU10 Downlight - Chrome	24
4L1/2214	Smart LED Fire Rated IP20 GU10 Downlight - Matt White	24
4L1/2215	Smart LED Fire Rated IP20 GU10 Downlight - Satin Chrome	24
4L1/2216	Smart LED Fire Rated IP20 GU10 Adjustable Downlight - Chrome	26
4L1/2217	Smart LED Fire Rated IP20 GU10 Adjustable Downlight - Matt White	26
4L1/2218	Smart LED Fire Rated IP20 GU10 Adjustable Downlight - Satin Chrome	26

Under Cabinets

SKU Code	Description	Page
4L1/1000/3	LED Under Cabinet Linklight	28
4L1/1000/4	LED Under Cabinet Linklight	28
4L1/1001/3	LED Under Cabinet Linklight	28
4L1/1001/4	LED Under Cabinet Linklight	28
4L1/1002/3	LED Under Cabinet Linklight	28
4L1/1002/4	LED Under Cabinet Linklight	28
4L1/1003/3	LED Under Cabinet Linklight	28
4L1/1003/4	LED Under Cabinet Linklight	28
4L1/1200	LED Circular Under Cabinet Linklight	30
4L1/1201	LED Circular Under Cabinet Linklight	30
4L1/1210/3	LED Triangular Under Cabinet Linklight	32
4L1/1210/4	LED Triangular Under Cabinet Linklight	32

Pendants

SKU Code	Description	Page
4L1/7200	LED Filament Circular Pendant - G125 Blackened Silver	34
4L1/7201	LED Filament Circular Pendant - G125 Antique Brass	34
4L1/7202	LED Filament Circular Pendant - ST64 Blackened Silver	34
4L1/7203	LED Filament Circular Pendant - ST64 Blackened Silver	34
4L1/7007	Decorative 3 Light Bar Ceiling Penant - Blackened Silver Less Lamp	36
4L1/7008	Decorative 3 Light Bar Ceiling Penant - Antique Brass Less Lamp	36
4L1/7005	Decorative 3 Light Ceiling Penant - Blackened Silver Less Lamp	38
4L1/7006	Decorative 3 Light Ceiling Penant - Antique Brass Less Lamp	38
4L1/7013	Decorative Bird Cage - Matt Black Less Lamp	40
4L1/7012	Decorative Bell Cage - Matt Black Less Lamp	42
4L1/7011	Decorative Globe Cage - Matt Black Less Lamp	44
4L1/7010	Decorative Pear Cage - Matt Black Less Lamp	46
4L1/7004	Single Pendant Blackened Silver with Amber G125 LED Smart Lamp	48
4L1/7003	Single Pendant Blackened Silver with Amber ST64 Filament LED Smart Lamp	50
4L1/7017	3 Light Bar Pendant Blackened Silver with Amber G125 LED Smart Lamp	52
4L1/7016	3 Light Plate Pendant Blackened Silver with Amber G125 Filament LED Smart Lamp	54
4L1/7015	Bird Cage Pendant with Amber ST64 LED Smart Lamp	56
4L1/7014	Pear Cage Pendant with Amber ST64 Filament LED Smart Lamp	58

Garden Spikes, Inground & Wall Lights

SKU Code	Description	Page
4L2/2001	LED Spike Light	60
4L2/2000	LED Spike Light GU10	62
4L2/2010	Smart LED Spike Light GU10	64
4L2/2100	LED Inground	66
4L2/6100	LED Surface Brick Light/Wall Light	67
4L2/3000	LED Die-cast Wall Light	68
4L2/2305	Smart LED Outdoor Up and Down Wall Light	70
4L2/6102	Smart LED Outdoor Modern Exterior Wall Light LED	72
4L2/3414	LED Decorative Lantern	74
4L2/3415	LED Decorative Lantern PIR	74
4L2/3412	Decorative Lantern	76
4L2/3413	Decorative Lantern PIR	76
4L2/3416	LED Decorative Half Wall Lantern	78
4L2/3417	LED Decorative Half Wall Lantern PIR	78
4L2/3410	Decorative Half Lantern	80
4L2/3411	Decorative Half Lantern PIR	80

Festoons & Lanterns

SKU Code	Description	Page
4L2/8000	Festoon Lighting Integrated LED 10M	82
4L2/8001	Festoon Lighting Integrated LED 20M	82
4L2/8002	Festoon Lighting E27 Lamp Holders 10M	84
4L2/8003	Festoon Lighting E27 Lamp Holders 20M	84
4L2/4100	LED Square Portable Lantern	86
4L2/4101	LED Rectangle Portable Lantern	86

Solar Wall Lights, Solar Bollards & Bollards

SKU Code	Description	Page
4L1/7200	LED Solar Bollard	88
4L1/7201	LED Solar Wall Light	90
4L1/7202	LED Rectangular Solar Bollard	92
4L1/7203	LED Rectangular Wall Light	93
4L1/7007	LED Circular Solar Bollard	94
4L1/7008	LED Circular Solar Wall Light	95
4L1/7005	LED Domestic Bollard	96

Floodlights & Security Lights

SKU Code	Description	Page
4L2/1000	LED Die-cast Floodlight - 10W	98
4L2/1001	LED Die-cast Floodlight - 20W	98
4L2/1002	LED Die-cast Floodlight - 30W	98
4L2/1003	LED Die-cast Floodlight - 50W	98
4L2/1004	LED Die-cast Floodlight PIR - 10W	100
4L2/1005	LED Die-cast Floodlight PIR - 20W	100
4L2/1006	LED Die-cast Floodlight PIR - 30W	100
4L2/1007	LED Die-cast Floodlight PIR - 50W	100
4L2/1010	LED Floodlight - 10W	102
4L2/1011	LED Floodlight - 20W	102

Floodlights & Security Lights

SKU Code	Description	Page
4L2/1012	LED Floodlight - 30W	102
4L2/1013	LED Floodlight - 50W	102
4L2/1014	LED Floodlight PIR - 10W	104
4L2/1015	LED Floodlight PIR - 20W	104
4L2/1016	LED Floodlight PIR - 30W	104
4L2/1017	LED Floodlight PIR - 50W	104
4L2/1020	LED Floodlight - 10W	106
4L2/1021	LED Floodlight - 20W	106
4L2/1022	LED Floodlight - 30W	106
4L2/1023	LED Floodlight - 50W	106
4L2/1024	LED Floodlight - 100W	106
4L2/1025	LED Floodlight - 150W	106
4L2/1026	LED Floodlight - 200W	106
4L2/1027	LED Floodlight PIR - 10W	108
4L2/1028	LED Floodlight PIR - 20W	108
4L2/1029	LED Floodlight PIR - 30W	108
4L2/1030	LED Floodlight PIR - 50W	108
4L2/1100	LED Security Light	110

High Bays

SKU Code	Description	Page
4L3/1203	LED High Bay - 100W	112
4L3/1204	LED High Bay - 150W	112
4L3/1205	LED High Bay - 200W	112
4L3/1206	LED High Bay - 100W	114
4L3/1207	LED High Bay - 150W	114
4L3/1208	LED High Bay - 200W	114
4L3/1209	High Bay Microwave Programmer	114
4L3/1210	High Bay Bracket Accessories	114

Battens

SKU Code	Description	Page
4L3/1100	LED Non-Corrosive - 4 Ft Single	116
4L3/1101	LED Non-Corrosive - 5 Ft Single	116
4L3/1102	LED Non-Corrosive - 6 Ft Single	116
4L3/1103	LED Non-Corrosive - 4 Ft Twin	116
4L3/1104	LED Non-Corrosive - 5 Ft Twin	116
4L3/1105	LED Non-Corrosive - 6 Ft Twin	116
4L3/1110	LED Weatherproof Batten - 1200mm	118
4L3/1111	LED Weatherproof Batten - 1500mm	118
4L3/1112	LED Weatherproof Batten - 1800mm	118
4L3/1113	LED Weatherproof Batten - Twin 600mm	118
4L3/1114	LED Weatherproof Batten - Twin 1200mm	118
4L3/1115	LED Weatherproof Batten Twin - 1500mm	118
4L3/1116	LED Weatherproof Batten Twin - 1800mm	118
4L3/2000	LED Surface Linear - 4ft	120
4L3/2001	LED Surface Linear - 4ft	120
4L3/2002	LED Surface Linear - 5ft	120
4L3/2003	LED Surface Linear - 5ft	120
4L3/2004	LED Surface Linear - 6ft	120

Battens

4L3/2005	LED Surface Linear - 6ft	120
4L3/2010	LED Batten Twin - 600mm	122
4L3/2011	LED Batten Twin - 1200mm	122
4L3/2012	LED Batten Twin - 1500mm	122
4L3/2013	LED IP20 Batten Twin Daylight - 600mm	122
4L3/2014	LED IP20 Batten Twin Daylight - 1200mm	122
4L3/2015	LED IP20 Batten Twin Daylight - 1500mm	122

Bulkheads

SKU Code	Description	Page
4L1/3002	LED CCT Ceiling/Wall Light - Matt White	124
4L1/3003	LED CCT Ceiling/Wall Light - Chrome	124
4L1/3320	Smart LED Ceiling/Wall Light - Matt White	126
4L1/3321	Smart LED Ceiling/Wall Light - Chrome	126
4L1/3102	LED CTT Circular Surface - White	128
4L1/3103	LED CTT Circular Surface - Chrome	128
4L1/3104	LED CTT Circular Surface - Graphite	128
4L1/3322	Smart LED Circular Surface - White	130
4L1/3323	Smart LED Circular Surface - Chrome	130
4L1/3324	Smart LED Circular Surface - Graphite	130

Glossary

Beam angle - Beam angle is a measurement of how the light is distributed. LED beam angles typically vary between 10° - 120°. The beam angle is the area where the light is at its most intense.

Bathroom Zones* - Bathroom zones are areas where electrical equipment must offer a certain degree of protection against water. There are three classified zones and a further zone which is for installations classed as being 'outside of the other zones'.

Colour temperature - The Colour Temperature is a description of the warmth or coolness of a light source. It is a scale that measures how 'warm' (yellow) or 'cool' (blue) the light is. It is measured in degrees of the Kelvin scale (K). The lower the K the warmer the light.

Colour rendering - This is an assessment of how the light source shows object colours "naturally" when compared to a familiar basis of reference, either natural or artificial light source. Expressed as a rating from 0 to 100 on the Colour Rendering Index (CRI).


IP protection** - All electrical devices are tested to determine a level of resistance against the intrusion of liquids. Once tested, the product is given an IP rating, which stands for Ingress Protection. The higher the IP rating the more water resistant.

IK Rating - IK ratings are defined as IKXX, where "XX" is the number from 00 up to 10, indicating the degree level of protection provided by the fitting against external mechanical impacts.

Lifespan - The lifetime is the number of operating hours until the light intensity is reduced.

Protection class - Power supplies fall into one of three protection classes, based on the need (or not) for a protective earth connection Class 1, Class 2, or Class 3.

Fire rating - Fire Resistance is an important and detailed requirement for buildings where fire resistance is expressed as the number of minutes of time duration where the building material and/or its component has the ability to withstand and resist the effects caused and result from a fire.

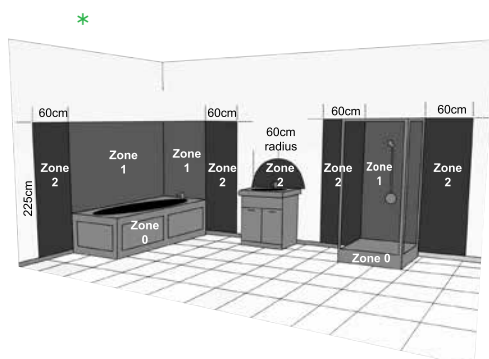

**

IP21 Greater than 12mm	Dripping water
IP22 Greater than 12mm	Dripping water (up to 15° angle)
IP23 Greater than 12mm	Spraying water (up to 60° angle)
IP40 Greater than 1mm	Non-protected
IP43 Greater than 1mm	Spraying water (up to 60° angle)
IP44 Greater than 1mm	Splashing water
IP54 Dust-protected	Splashing water
IP55 Dust-protected	Water jets
IP64 Dust-tight	Splashing water
IP65 Dust-tight	Water jets
IP66 Dust-tight	Powerful water jets
IP67 Dust-tight	Water immersion
IP68 Dust-tight	Submersion to declared depth

Notes



For more information, please contact
sales@4liteuk.com

First Floor, No. 3 Booths Park, Knutsford WA16 8QZ

4liteuk.com

a wholly owned subsidiary of

ENDO
LIGHTING CORP.